Easy UPS On-Line 230V Brochure

Business continuity made easy

se.com

Life Is On Schneider Electric

APC in Numbers

APC is **#1** in power protection market share

96% of Fortune 500 companies use APC products

+100 million

Single-phase UPS installed worldwide

Over **75%** of IT managers use APC because of durability, reliability, and trust

Why do you need Uninterruptible Power Supply (UPS)?

An Uninterruptible Power Supply (UPS) helps ensure that businesses have power protection for critical applications. A UPS provides protection for these critical systems in the event of a power disruption, whether it's a prolonged outage or just a blip that can nonetheless damage sensitive machines such as computers and cash registers.

The UPS helps provide backup power that can keep critical equipment up and running during relatively short outages. It allows you to safely power them down in the event of a longer outage and are a critical component of any business continuity plan.

Network Availability

Ability to ride out all disruptions rather than shutdown

Hardware Protection

Avoid loss or corruption caused by power issues

Data Protection

Prevent damage caused by EMI/RFI interference, and other power issues

Energy Efficiency

Lower operating costs and a smaller carbon footprint

Avoid High Cost of Downtime

Maintain business operations during outages and reduce disruption costs

What is Easy UPS?

APC Easy UPS are quality products for price-conscious customers, helping to provide power protection and backup in unstable power conditions, and consistent and reliable connectivity at critical moments.

That's Certainty in a Connected World.

The key benefits of owning an APC Easy UPS:

- Provide real output power to support equipment during outages
- Pure sine wave output provides clean power to sensitive equipments
- Peace of mind from the trusted brand in power protection

Why consider APC Easy UPS?

APC Easy UPS tailors to home and business users challenges such as:

Unpredictable power disturbances and harsh power conditions

Limited budget for IT physical infrastructure

Lack of qualified on-site personnel

Expensive installation and maintenance

Easy UPS On-Line 230V

For small to medium businesses, APC™ Easy UPS On-Line provides essential power protection and power backup for unstable power conditions, ensuring consistent and reliable connectivity at the most critical moments.

The double-conversion Easy UPS On-Line is a versatile, high quality, cost competitive UPS designed to handle a wide input voltage range and inconsistent power conditions.

Standard Models

Built-in batteries for Plug-and-Play will provide a ~2 to 4 min typical battery backup power for the connected equipment at full load.

Extended Runtime Models

Extended runtime models have the capability to add external battery packs to scale runtime from minutes to hours, making them ideal for mixed load applications.

APC Easy UPS On-Line Features

Wide kVA Range of Products

Easy UPS On-Line is capable of supporting wide range of loads from 1000 VA to 20,000 VA.

Versatile Design

Rackmount and tower installation options enables flexible setup.

Extended Runtime

Extended runtime, enabled by additional external battery packs, accommodates the needs of long runtime applications.

Simplified Monitoring and Management

PowerChute™ Serial Shutdown software provides graceful unattended shutdown of servers and workstations using serial or USB cables and helps prevent data corruption and costly equipment damage.

Optional Network Management Card for remote monitoring with full Integration to EcoStruxure™ IT Software and PowerChute™ Network Shutdown.

Intuitive LCD Display

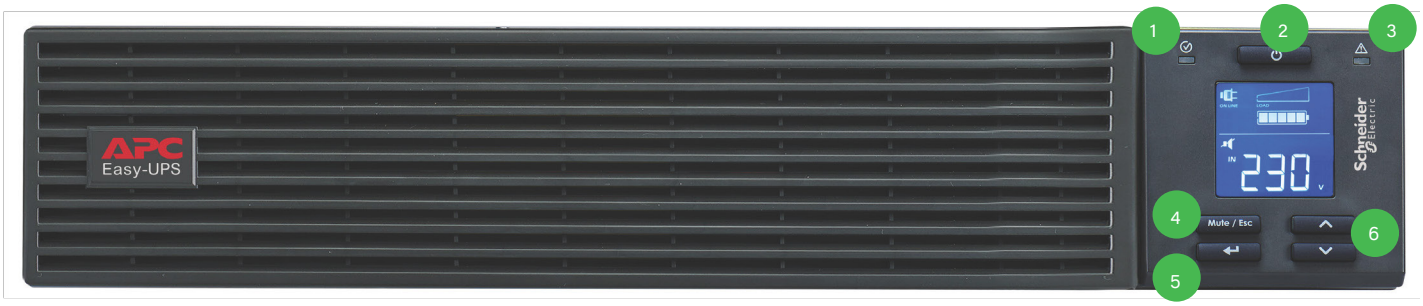

1. On/Off status: Indicates power is ON

2. On/Off button: Press to turn ON or OFF

3. Alert LED: Flashes red when UPS has a notification or is in steady state when there is an alert

4. Mute/Esc button: Mutes audible alarm and serves as the Escape key when in the sub menus display

5. Enter key: Press to enter the display menus and choose options.

6. UP/Down arrows: Navigate keys through the display menus

APC Easy UPS On-Line Features & Applications

Key Features

True on-line double-conversion

Ensures clean, reliable power supply to essential loads from brownouts, line noise, voltage transients and power outages.

High Power Factor

- 0.9 PF for 3000 VA and below
- Unity PF, VA = Watt for 5000 – 20,000 VA

Powers more servers than similar UPSs with equivalent VA ratings and lower power factors.

Built-in Automatic Bypass

Ensures seamless power to the load even in the event of UPS internal detected fault or error.

Cold Start Capability

Enables user to power up connected equipment's on battery mode when utility power is not available.

High Efficiency

Up to 88 – 94% efficiency in on-line double-conversion mode and 94 – 97% in ECO mode which saves utility and cooling costs without compromising performance or reliability.

Generator Compatible

Generator-compatible with a wide Input Frequency range (40 – 70 Hz) ensures clean, uninterrupted power to the loads during power outage.

Environmentally Robust

Conformal coated to help protect the components from the elements, including moisture, dust and extreme temperatures.

Wide Input Voltage Range

1000 – 3000 VA/105 – 300 Vac and 5000 – 20,000 VA/110 – 300 Vac, works in unstable power conditions and minimizes transfer time to battery.

LCD/LED Display

Intuitive interface provides detailed and accurate information about UPS status with ability to configure locally.

Emergency Power Off (EPO)

Remote UPS shutoff in the event of a fire or other emergency. The UPS can accept normally closed (NC) contacts (on select models only).

1:1, 3:1 input hard-wire options

Product can be wired for 3-PH or 1-PH input (10,000 VA, 15,000 VA and 20,000 VA models only).

2-year warranty on UPS

Comprehensive warranty for electronics and battery functionality provides peace of mind. In an unlikely event of a detected fault or error, your product will be repaired or replaced quickly.

Ideal Applications

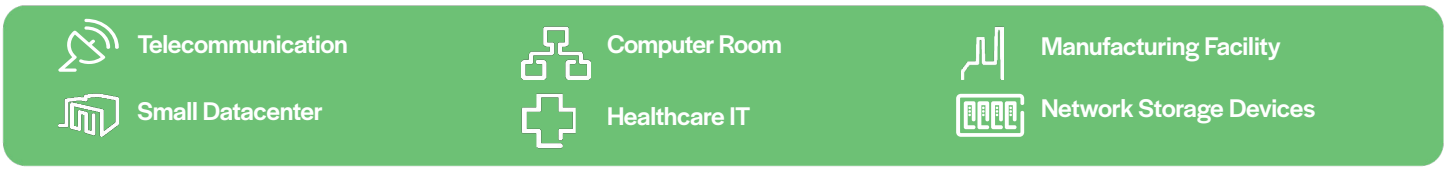

Easy UPS On-Line Runtime Estimates

Runtime estimates at half and full load for 1000 VA to 10,000 VA extended runtime models (minutes)

Number of Battery Packs	SRV1KIL-E SRV1KRILRK-E	SRV2KIL-E SRV2KRILRK-E	SRV3KIL-E SRV3KRILRK-E	SRV5KRILRK	SRV6KIL SRV6KRILRK	SRV10KIL SRV10KRILRK
UPS at half/full loads	450W/900W	900W/1800W	1350W/2700W	2500W/5000W	3000W/6000W	5000W/10,000W
(1) Battery pack (default)	50/21	67/29	34/14	22/9	18/6	8/2
(2) Battery packs	111/50	132/60	69/30	51/22	41/18	22/8
(3) Battery packs	169/77	207/95	112/50	82/37	66/29	36/15
(4) Battery packs	246/114	280/129	147/67	113/51	92/42	51/22
(5) Battery packs	288/134	328/151	209/96	145/67	118/54	66/29

Note: For more details, refer to the Runtime graphs available in apc.com.

Runtime estimates at load% for 10,000 VA to 20,000 VA extended runtime models (minutes)

UPS	Number of external battery packs	Runtime in minutes at given load%			
		25%	50%	75%	100%
SRV10KRIL31RK	(1) SRV120RLBP2-9A (default)	26	9	5	3
	(2) SRV120RLBP2-9A	61	23	15	9
	(3) SRV120RLBP2-9A	100	42	26	18
	(4) SRV120RLBP2-9A	141	61	37	25
	(5) SRV120RLBP2-9A	184	79	49	34
	(6) SRV120RLBP2-9A	228	100	61	43
	(7) SRV120RLBP2-9A	272	120	74	51
	(8) SRV120RLBP2-9A	316	141	86	61
	(9) SRV120RLBP2-9A	361	162	100	70
	(10) SRV120RLBP2-9A	406	184	114	80
SRV15KRILRK	(2) SRV120RLBP2-9A (default)	37	15	8	4.7
	(3) SRV120RLBP2-9A	60	26	15	10
	(4) SRV120RLBP2-9A	86	37	22	15
	(5) SRV120RLBP2-9A	112	48	29	20
	(6) SRV120RLBP2-9A	141	61	37	26
	(7) SRV120RLBP2-9A	169	73	44.5	31
	(8) SRV120RLBP2-9A	198	86	52.5	37
	(9) SRV120RLBP2-9A	227.5	99.5	60.5	42.5
	(10) SRV120RLBP2-9A	257	113	69	48.5
SRV20KRILRK	(2) SRV120RLBP2-9A (default)	23	8.9	4.7	2.5
	(3) SRV120RLBP2-9A	42	18	10	6
	(4) SRV120RLBP2-9A	61	25	15	9.5
	(5) SRV120RLBP2-9A	79	34	20	14
	(6) SRV120RLBP2-9A	100	43	26	18
	(7) SRV120RLBP2-9A	120	51	31	21.5
	(8) SRV120RLBP2-9A	141	61	37	26
	(9) SRV120RLBP2-9A	162	70	42.5	29.7
	(10) SRV120RLBP2-9A	184	80	48.5	34

Note: Runtime in the table are approximate only. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Easy UPS On-Line Accessories

Management card: AP9544

AP9811

Management cards and accessories

- **AP9544**: Optional Network Management Card for remote monitoring of SRV and SRVL series. The card enables full Integration to EcoStruxure™ IT Software and PowerChute™ Network Shutdown.
- **AP9811**: The USB to Dry Contact Accessory for NMC provides an interface for connecting a Network Management Card 3 (AP9544) with a peripheral dry contact device such as a button, door sensor, alarm panel or float switch. From the NMC3 user interface, you can monitor the state of the input device, configure the dry contact settings and actions based on status changes or UPS events.
- **SRVSMB001:** Modbus card for communication with PCs through MODBUS protocol.
- **VGL99011:** Dry contact card to monitor external triggers and initiate actions.

Note: Purchase and activation of license is require to access all features and capabilities of AP9544 card.

Battery pack: SRV72RLBP-9A

Battery pack: SRV72BP-9A

External battery packs

- **SRV36BP-9A**: APC Easy-UPS Battery Pack for SRV1KIL-E.
- **SRV72BP-9A**: APC Easy-UPS Battery Pack for SRV2KIL-E/SRV3KIL-E.
- **SRV240BP-9A**: APC Easy-UPS Battery Pack for SRV6KIL/SRV10KIL.
- **SRV36RLBP-9A**: APC Easy-UPS Battery Pack for SRV1KRILRK-E.
- **SRV72RLBP-9A**: APC Easy-UPS Battery Pack for SRV2KRILRK-E/ SRV3KRILRK-E.
- **SRV240RLBP-9A**: APC Easy-UPS Battery Pack for SRV5KRILRK/ SRV6KRILRK/SRV10KRILRK.
- **SRV120RLBP2-9A**: APC Easy-UPS battery pack for SRV10KRIL31RK/ SRV15KRILRK/ SRV20KRILRK.



Rail kit: SRVRK2

Rail kits

- **SRVRK1**: 700 mm depth, supports 19-inch rack equipment up to 60 kg.
- **SRVRK2**: 900 mm depth, supports 19-inch rack equipment up to 100 kg.

RBC: APCRBCV203

Replacement Battery Cartridge (RBC)

APC Easy Replacement Battery Cartridges comes fully assembled and can be easily replaced by an APC authorized service technician. The battery cartridges are compliant with international regulations and safe for transport.

Tower Model	Compatible RBC	Rackmount Model	Compatible RBC
SRV1KI-E	APCRBCV203	SRV1KRI-E SRV2KRI-E	APCRBCV200
SRV2KI-E	APCRBCV204	SRV3KRI-E	APCRBCV201
SRV3KI-E	APCRBCV205		APCRBCV202

Easy UPS Management Solutions

PowerChute™ Serial Shutdown

For Graceful Unattended Shutdown of Servers and Workstations

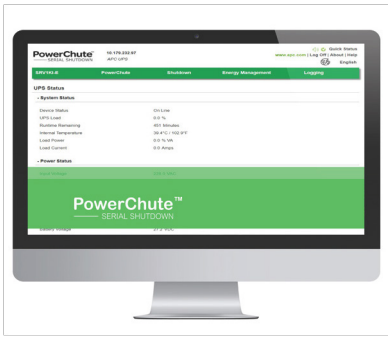

Key Features

Convenience
- Initial Set-Up Wizard
- SMTP Authentication
- Password Security
- Secure Communication
- Multiple Language Support

Manageability
- Notification
- Data Logging
- Event Logging
- Run Command File
- Multiple Easy UPS Management

Protection
- Load Shedding
- Scheduling Capability
- Operating System Shutdown
- Sequenced Network Shutdown and Reboot
- Outlet Group Control

Compatibility
- System Event Log Integration
- Enterprise Management System Compatible
- PowerChute Serial Shutdown OS Compatibility

Energy Management
- Configurable energy costs
- CO2 emissions reporting
- Energy usage reporting
- Energy cost reporting

Graceful unattended shutdown of servers and workstations using serial or USB cables helps prevent data corruption and costly equipment damage. Learn More on apc.com/pcss.

Optional Easy UPS Network Management Card (AP9544)

The Network Management Card for Easy UPS On-Line (AP9544) enables secure remote monitoring and control of one Easy UPS On-Line through the easy-to-use web browser interface, via EcoStruxure™ IT Software or another SNMP-enabled system.



Key Features

Enhanced Security
- Secure Boot with Root of Trust
- Increased password security with stricter credentials and force password policy configurations
- 3-tier user access (read only, device and administrator)
- Secure access SSH, HTTPS (TLS 1.2)
- Secure file transfer (SCP)
- 2048-bit encryption key support (SSH/web)

Enhanced Performance
- 1 Gigabit Ethernet connection (RJ-45 10/100/1000 Base-T)
- Simultaneous multiple user login: Supports multiple sessions

Enhanced User Experience and Troubleshooting
- Pre-loaded multiple language support
- Micro USB based console

For more information, visit apc.com/secure-nmc.

Standard Tower Models

SKU technical specifications

Product feature	SRV1KI-E	SRV2KI-E	SRV3KI-E	SRV6KI 6000	SRV10KI
Power rating	1000 VA/900 W	2000 VA/1800 W	3000 VA/2700 W	VA/6000 W	10000 VA/10000 W
Input					
Nominal input voltage	230 V				
Input voltage range at full load	180 – 285 V (110 – 285 V @ 40% load)			176 – 300 V (110 – 300 V @ 60% load)	
Input frequency	40 – 70 Hz auto-selecting				
Input connection	IEC 60320 C14		IEC 60320 C20	Hard wire 3-wire (1P+N+G)	
Output					
Nominal output voltage	230 V (220 V, 240 V user selectable)				
Output frequency	50/60 Hz ± 3 Hz (On Mains) or 50/60 Hz ± 0.1 Hz (On Battery)				
Topology	Double-conversion on-line				
Waveform type	Pure sine wave				
Efficiency: Double-conversion mode (typical)	Up to 88%		Up to 90%	Up to 94%	
Efficiency: ECO mode (typical)	Up to 94%		Up to 95%	Up to 97%	
Output connections	(3) IEC 60320 C13	(4) IEC 60320 C13	(6) IEC 60320 C13 (1) IEC 60320 C19	(1) Hard wire 3-wire (1P+N+G)	
Battery and Runtime*					
Battery type	Sealed maintenance free valve regulated lead-acid battery (leak proof)				
Battery capacity	12 V 9 Ah (2)	12 V 9 Ah (4)	12 V 9 Ah (6)	12 V 7 Ah (16)	12 V 9 Ah (16)
Battery voltage	24 V	48 V	72 V	192 V	
Replacement battery pack	APCRBCV203	APCRBCV204	APCRBCV205	-	-
Typical recharge time	4 hours to recover 90% of capacity				
Runtime at half load (min)	10	10	10	12	10
Runtime at full load (min)	3	3	3	4	3
Communications and management					
Interface ports	Serial RS-232, USB (Type B), Intelligent Slot				
Control panel	LED indicators, multi-function LCD, status and display console				
Emergency Power Off (EPO)	Yes (NC contacts)				
Physical					
Dimensions W x H x D (mm)	145 x 223 x 288	145 x 238 x 400	190 x 336 x 425	190 x 685 x 374	190 x 685 x 447
Net weight (kg)	9.6	17	26	54	65
Colour	RAL 7010				
Environment					
Operating temperature	0 to 40 °C				
Relative humidity	0 to 95% non-condensing				
Operating elevation	0 to 2,000 m at 100% load			0 to 1,000 m at 100% load	
Audible noise at 1 m from unit	Less than 50 dBA			Less than 55 dBA	Less than 58 dBA
International Protection Code	IP20				
Conformance					
Regulatory approvals	CE, UKCA, TISI, IEC 62040-1, IEC 62040-2				
Standard warranty	2 years repair or replace				

All specifications are subject to change without prior notice.
* Runtime in the table are approximate only. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Standard Rack Models

SKU technical specifications

Product feature	SRV1KRIRK-E	SRV2KRIRK-E	SRV3KRIRK-E	SRV5KRIRK	SRV6KRIRK	SRV10KRIRK
Power rating	1000 VA/900 W	2000 VA/1800 W	3000 VA/2700 W	5000 VA/5000 W	6000 VA/6000 W	10000 VA/10000 V
Input						
Nominal input voltage	230 V					
Input voltage range at full load	180 – 285 V (110 – 285 V @ 40% load)			176 – 300 V (110 – 300 V @ 60% load)		
Input frequency	40 – 70 Hz auto-selecting					
Input connection	IEC 60320 C14		IEC 60320 C20	Hard wire 3-wire (1P+N+G)		
Output						
Nominal output voltage	230 V (220 V, 240 V user selectable)					
Output frequency	50/60 Hz ± 3 Hz (On Mains) or 50/60 Hz ± 0.1 Hz (On Battery)					
Topology	Double-conversion on-line					
Waveform type	Pure sine wave					
Efficiency: Double-conversion mode (typical)	Up to 88%		Up to 90%	Up to 94%		
Efficiency: ECO mode (typical)	Up to 94%		Up to 95%	Up to 97%		
Output connections	(3) IEC 60320 C13	(4) IEC 60320 C13	(6) IEC 60320 C13 (1) IEC 60320 C19	(1) Hard wire 3-wire (1P+N+G)		
Battery and Runtime*						
Battery type	Sealed maintenance free valve regulated lead-acid battery (leak proof) 12 V 7 Ah (16) 12 V 9 Ah					
Battery capacity	12 V 9 Ah (2)	12 V 9 Ah (4)	12 V 9 Ah (6) (16)	72 V 192 V SRV192RBP-7A		SRV192RBP-9A
Battery voltage	24 V	48 V				
Replacement battery pack	APCRBCV200	APCRBCV201	APCRBCV202			
Typical recharge time	4 hours to recover 90% of capacity					
Runtime at half load (min)	10	10	10	15	12	10
Runtime at full load (min)	3	3	3	5	4	3
Communications and management						
Interface ports	Serial RS-232, USB (Type B), Intelligent Slot					
Control panel	LED indicators, multi-function LCD, status and display console					
Emergency Power Off (EPO)	Yes (NC contacts)					
Physical						
Rack height (U)	2U	2U	2U	4U		
Dimensions W x H x D (mm)	438 x 86 x 312	438 x 86 x 462	438 x 86 x 632	438 x 173 x 710		
Net weight (kg)	11.5	18.8	28.5	61		69
Colour	RAL 7010					
Environment						
Operating temperature	0 to 40 °C					
Relative humidity	0 to 95% non-condensing					
Operating elevation	0 to 2,000 m at 100% load			0 to 1,000 m at 100% load		
Audible noise at 1 m from unit	Less than 50 dBA			Less than 55 dBA		Less than 58 dBA
International Protection Code	IP20					
Conformance						
Regulatory approvals	CE, UKCA, TISI, IEC 62040-1, IEC 62040-2					
Standard warranty	2 years repair or replace					

All specifications are subject to change without prior notice.
* Runtime in the table are approximate only. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Extended Runtime Tower Models

SKU technical specifications

Product feature	SRV1KIL-E	SRV2KIL-E	SRV3KIL-E	SRV6KIL 6000	SRV10KIL
Power rating	1000 VA/900 W	2000 VA/1800 W	3000 VA/2700 W	VA/6000 W	10000 VA/10000 W
Input					
Nominal input voltage	230 V				
Input voltage range at full load	180 – 285 V (105 – 300 V @ 40% load)			176 – 300 V (110 – 300 V @ 60% load)	
Input frequency	40 – 70 Hz auto-selecting				
Input connection	IEC 60320 C14		IEC 60320 C20	(1) Hard wire 3-wire (1P+N+G)	
Output					
Nominal output voltage	230 V (220 V, 240 V user selectable)				
Output frequency	50/60 Hz ± 3 Hz (On Mains) or 50/60 Hz ± 0.1 Hz (On Battery)				
Topology	Double-conversion on-line				
Waveform type	Pure sine wave				
Efficiency: Double-conversion mode (typical)	Up to 88%		Up to 90%	Up to 94%	
Efficiency: ECO mode (typical)	Up to 94%		Up to 95%	Up to 97%	
Output connections	(4) IEC 60320 C13	(4) IEC 60320 C13	(6) IEC 60320 C13 (1) IEC 60320 C19	(1) Hard wire 3-wire (1P+N+G)	
Battery and Runtime*					
Battery type	Sealed maintenance free valve regulated lead-acid battery (leak proof)				
Battery capacity	2 strings of 12 V 9 Ah (3)	2 strings of 12 V 9 Ah (6)		1 string of 12 V 9 Ah (20)	
Battery voltage	36 V	72 V		240 V	
External battery pack	SRV36BP-9A	SRV72BP-9A		SRV240BP-9A	
Typical recharge time	4 hours to recover 90% of capacity				
Runtime at half load (min)	50	67	34	18	8
Runtime at full load (min)	21	29	14	6	2
Communications and management					
Interface ports	Serial RS-232, USB (Type B), Intelligent Slot				
Control panel	LED indicators, multi-function LCD, status and display console				
Emergency Power Off (EPO)	Yes (NC contacts)				
Physical (PM: Power Module, BP: Battery Pack)					
Dimensions W x H x D (mm)(PM)	145 x 223 x 288	145 x 238 x 400		190 x 336 x 374	190 x 336 x 447
Dimensions W x H x D (mm) (BP)	145 x 238 x 400	190 x 336 x 425		190 x 368 x 485	
Net weight (kg)(PM)	5	7.8	8.2	13	16.5
Net weight (kg) (BP)	19.6	38		60	
Colour	RAL 7010				
Environment					
Operating temperature	0 to 40 °C				
Relative humidity	0 to 95% non-condensing				
Operating elevation	0 to 3,000 m at 100% load			0 to 1,000 m at 100% load	
Audible noise at 1 m from unit	Less than 53 dBA			Less than 55 dBA	Less than 58 dBA
International Protection Code	IP20				
Conformance					
Regulatory approvals	CE, UKCA, TISI, IEC 62040-1, IEC 62040-2				
Standard warranty	2 years repair or replace				

All specifications are subject to change without prior notice.
* Runtime in the table are approximate only. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Extended Runtime Rack Models

SKU technical specifications

Product feature	SRV1KRILRK-E	SRV2KRILRK-E	SRV3KRILRK-E	SRV5KRILRK	SRV6KRILRK	SRV10KRILRK
Power rating	1000 VA/900 W	2000 VA/1800 W	3000 VA/2700 W	5000 VA/5000 W	6000 VA/6000 W	10000 VA/10000 V
Input						
Nominal input voltage	230 V					
Input voltage range at full load	180 – 285 V (105 – 300 V @ 40% load)			176 – 300 V (110 – 300 V @ 60% load)		
Input frequency	40 – 70 Hz auto-selecting					
Input connection	IEC 60320 C14		IEC 60320 C20	(1) Hard wire 3-wire (1P+N+G)		
Output						
Nominal output voltage	230 V (220 V, 240 V user selectable)					
Output frequency	50/60 Hz ± 3 Hz (On Mains) or 50/60 Hz ± 0.1 Hz (On Battery)					
Topology	Double-conversion on-line					
Waveform type	Pure sine wave					
Efficiency: Double-conversion mode (typical)	Up to 88%		Up to 90%	Up to 94%		
Efficiency: ECO mode (typical)	Up to 94%		Up to 95%	Up to 97%		
Output connections	(4) IEC 60320 C13	(4) IEC 60320 C13	(6) IEC 60320 C13 (1) IEC 60320 C19	(1) Hard wire 3-wire (1P+N+G)		
Battery and Runtime*						
Battery type	Sealed maintenance free valve regulated lead-acid battery (leak proof)					
Battery capacity	2 strings of 12 V 9 Ah (2)	2 strings of 12 V 9 Ah (6)		1 string of 12 V 9 Ah (20)		
Battery voltage	36 V	72 V		240 V		
External battery pack	SRV36RLBP-9A	SRV72RLBP-9A		SRV240RLBP-9A		
Typical recharge time	4 hours to recover 90% of capacity					
Runtime at half load (min)	50	67	34	22	18	8
Runtime at full load (min)	21	29	14	9	6	2
Communications and management						
Interface ports	Serial RS-232, USB (Type B), Intelligent Slot					
Control panel	LED indicators, multi-function LCD, status and display console					
Emergency Power Off (EPO)	Yes (NC contacts)					
Physical						
Rack height (U)	4U			5U		
Dimensions W x H x D (mm)	438 x 172 x 412	438 x 172 x 632		438 x 219.5 x 615		
Net weight (kg)	27	51.7	52	77		79
Colour	RAL 7010					
Environment						
Operating temperature	0 to 40 °C					
Relative humidity	0 to 95% non-condensing					
Operating elevation Audible	0 to 3,000 m at 100% load			0 to 1,000 m at 100% load		
noise at 1 m from unit	Less than 53 dBA			Less than 55 dBA		Less than 58 dBA
International Protection Code	IP20					
Conformance						
Regulatory approvals	CE, UKCA, TISI, IEC 62040-1, IEC 62040-2					
Standard warranty	2 years repair or replace					

All specifications are subject to change without prior notice.
* Runtime in the table are approximate only. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Extended Runtime Rack Models

SKU technical specifications

Product feature	SRV10KRIL31RK	SRV15KRILRK	SRV20KRILRK
Power rating	10,000 VA/10,000 W	15,000 VA/15,000 W	20,000 VA/20,000 W
Input			
Nominal input voltage	230 V (PH-N)/400 V (PH-PH) (default)		
Input voltage range at full load (half load)	176 – 300/305 – 520 V (110 – 300/190 – 520 V)	176 – 275/305 – 476 V (110 – 300/190 – 520 V)	
Input frequency	40 – 70 Hz auto-selecting		
Input connection	(1) Hard wire 3-wire (1P+N+G) or (1) Hard wire 5-wire (3P+N+G)		
Output			
Nominal output voltage	230 V (220 V, 240 V user selectable)		
Output frequency	50/60 Hz ± 3 Hz (On Mains) or 50/60 Hz ± 0.5% (On Battery)		
Topology	Double-conversion on-line		
Waveform type	Pure sine wave		
Efficiency: Double-conversion mode (typical)	Up to 95%		
Efficiency: ECO mode (typical)	Up to 97%		
Output connections	(1) Hard wire 3-wire (1P+N+G)		
Battery and Runtime*			
Battery type	Sealed Maintenance Free Valve Regulated Lead Acid Battery (Leak Proof)		
Battery capacity	1 string of 12 V 9 Ah (20)	2 strings of 12 V 9 Ah (20)	
Battery voltage	± 120 V		
External battery pack	SRV120RLBP2-9A (1)	SRV120RLBP2-9A (2)	
Typical recharge time	6 hours to recover 90% of capacity		
Runtime at half load (min)	9	15	8.9
Runtime at full load (min)	3	4.7	2.5
Communications and management			
Interface ports	Serial RS-232, USB (Type B), Intelligent Slot		
Control panel	LED indicators, multi-function LCD, status and display console		
Emergency power off (EPO)	Yes (NC contacts)		
Physical			
Rack height (U)	6U	9U	
Dimensions W x H x D (mm)	438 x 262 x 680	438 x 393 x 690	
Net weight (kg)	89	157	
Color	RAL 7010		
Environment			
Operating temperature	0 to 40 °C		
Relative humidity	0 to 95% non-condensing		
Operating elevation	0 to 1,000 m at 100% load		
Audible noise at 1 m from unit	Less than 60 dBA		
Internal protection code	IP20		
Conformance			
Regulatory approvals	CE, UKCA, TISI, IEC 62040-1, IEC 62040-2		
Standard warranty	2 years repair or replace		

All specifications are subject to change without prior notice.
* Runtime in the table are approximate only. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

Life Is On | Schneider Electric

se.com

Schneider Electric Industries SAS

Head Office
35 rue Joseph Monier
Rueil Malmaison 92500 - France
Tel.: +33 (0)1 41 29 70 00

www.se.com

©2022 Schneider Electric. All Rights Reserved.
Schneider Electric | Life Is On is a trademark and the property of Schneider Electric SE, its subsidiaries, and affiliated companies. January 2025